


Thermal Receipt Printer SRP-350



Thermal Printer SRP-350

- High-end thermal print technology : Quiet printing for a convenient atmosphere in the cash zone. Printer can also be used in high-class shops; avoids disturbing the staff and the customers at POS environment
- High printing speed : The SRP-350 prints at speeds of up to 150mm per second
- Easy system integration : Drivers are available for Windows 95/98/ME/NT4.0/XP/2003 server and OPOS
- A simple drop-in loading system means that even inexperienced operators can load paper rolls with the minimum of efforts
- Convenient software program : Logo/firmware download program helps you use logo efficiently and easily
- Various interface cards : The SRP-350 features modular interface, RC-232C, RS-485, Parallel, USB, Ethernet 10/100 Base T), Bluetooth interfaces simply by ordering a new module.
- Easy paper jam clearance
- Barcode printing

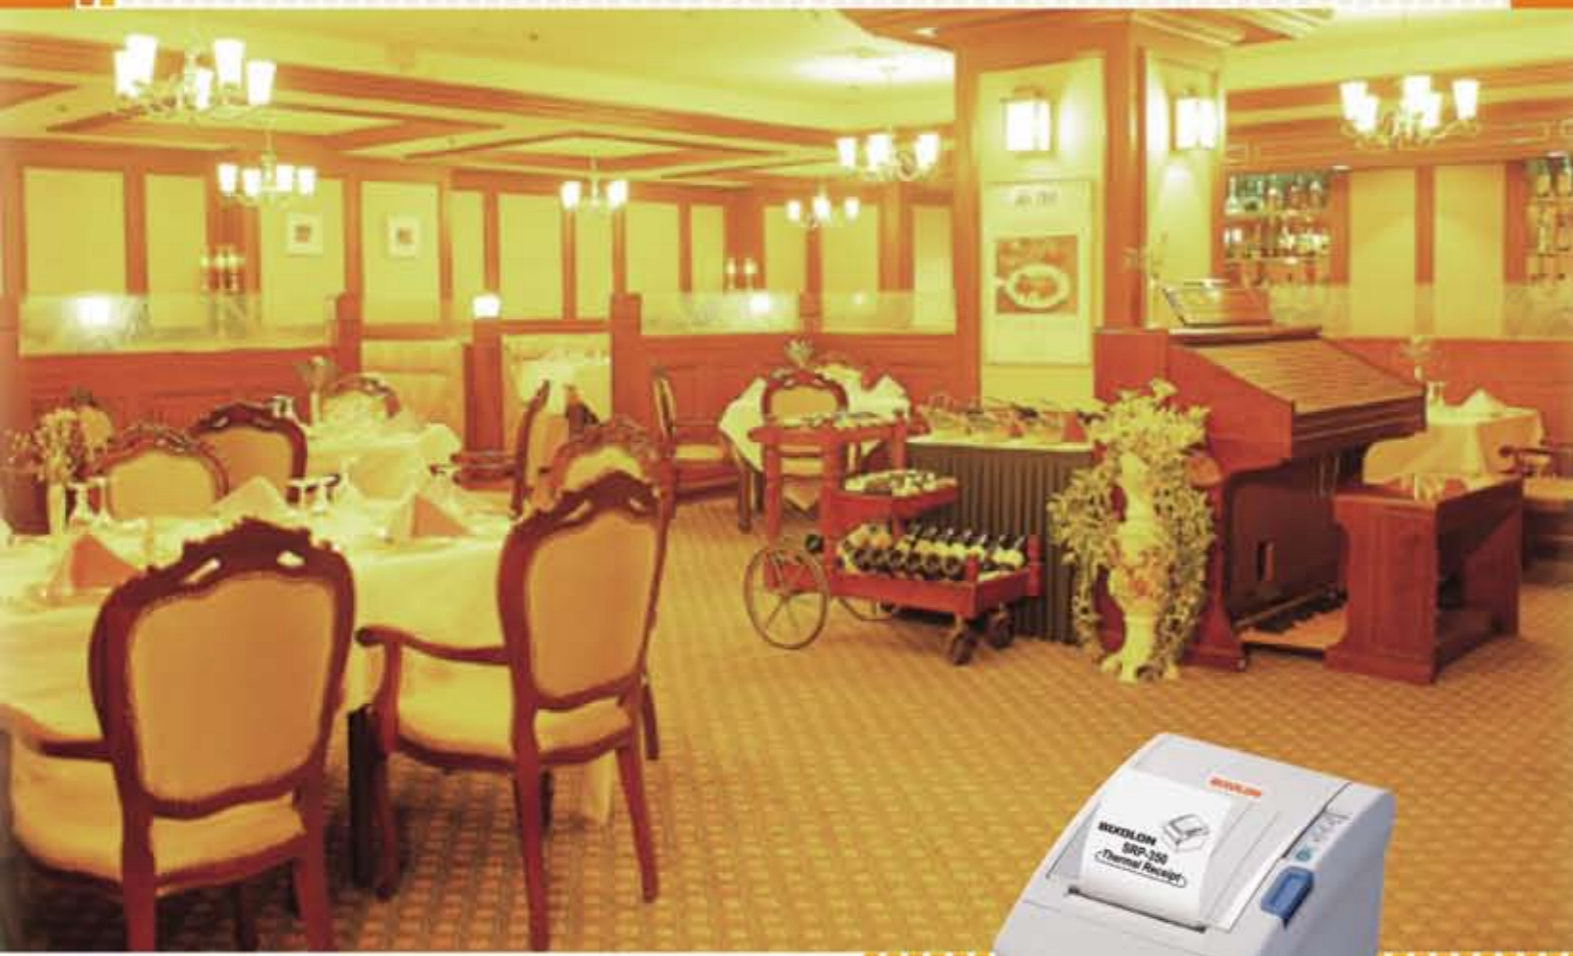

Easy Paper Loading



Small space for installation



Attractive Features



SPECIFICATION FOR THE SRP-350 THERMAL PRINTER

PRINT	PRINT METHOD	Direct Thermal	
	PRINT SPEED	150mm / sec (47.2 LPS)	
	PAPER SUPPLY METHOD	Easy Paper Loading	
	RESOLUTION	180 dpi (7dot / mm)	
	CHARACTER SET	Alphanumeric Character	: 96
		Extended Graphic	: 128 x 7 page (1space page)
		International Character	: 32
CHARACTER SIZE	Font A : 12 x 24 Font B : 9 x 17		
CHARACTER PER LINE	Font A : 42 Font B : 56		
PAPER ROLL	PAPER TYPE	Thermal paper	
	WIDTH	79.5 mm ± 0.5mm	
	DIAMETER	Max. ∅ 83.0mm	
RELIABILITY	MCBF	37,000,000 Lines	
	AUTO CUTTER	1.5 million cuts	
	TPH	100Km	
BARCODES		1D : EAN -13, EAN -8, Code 39, Code 93, Code 128, ITF, Code bar, UPC - A, UPC - E	
		2D : PDF417, QR Code	
EMULATION		ESC / POS	
FLASH MEMORY		16 Mbit	
DRIVER		Windows 95 / 98 / Me / 2000 / NT / XP / 2003 server, OPOS	
SENSOR	2 OPTIONAL	Paper Near End Sensor, Paper End Sensor	
DRAWER PORT		2 ports	
CONNECTIVITY	INTERFACE	RS - 232C, IEEE1284, USB, USB + Serial, RS - 485, Ethernet(10 / 100 Base - T), Bluetooth	
OPTIONS	LANGUAGE	Buyer language support	
	WALL MOUNT	RWM - 350	
	COLOR	Ivory, Dark gray	
POWER	SUPPLY	AC120V - 230V x 10% (include), DC24V, 2.3A	
DIMENSION		145(W) x 158(L) x 148(H) mm	
AUTO CUTTER	TYPE	Guillotine	

Look no further for thermal printing on 80mm wide paper, the SRP-350 is all you need. Not only for the retail environment but also for medical, warehouse, manufacturing, mail order etc..

Benefiting from Windows and OPOS drivers this great printer is easy to integrate to any system. Fast speed and reliability you can expect from a leading manufacturer. Providing simplicity for the operator with "drop in and print" paper loading and ease of connectivity for the technician with interchangeable interfaces and industry standard drivers. The modern design and small footprint enhance any environment.

BIXOLON
SAMSUNG mini printers

BIXOLON
SAMSUNG mini printers

E-mail : sales@samsungminiprinters.com
www.samsungminiprinters.com

Distributed by :

* Design & Specification are subject to change without notice.
2006.5